


TOK®-Band Spezial Rundstrang



Product Information

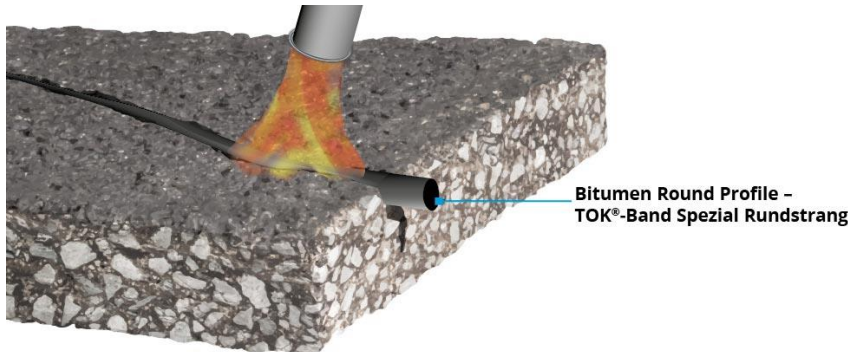

Special Advantages:

- Simple to work with.
- Suitable for use in sealing faulty cuts.
- For cracks in asphalt wearing courses, also for crack widths >5 mm.

TOK®-Band Spezial Rundstrang is a bitumen round profile for a wide range of applications.

For a century now, DENSO Group Germany represents experience, quality and reliability for corrosion prevention and sealing technology. The success of the internationally leading corporation is based on the development of the "DENSO-Tape", which was already patented in 1927 as the first product worldwide for the passive corrosion prevention of pipelines. Since then, the DENSO Group Germany establishes and guarantees the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees continuously implement safe and individual solutions in a personal cooperation with the customer.

Product Description and Application

TOK®-Band Spezial Rundstrang is made from the same material as the proven bitumen joint tape, TOK®-Band Spezial. Its rounded profile is used for sealing cracks (for example). Such cracks can even be greater than 5 mm wide. The round profile is worked into the crack as a filling.

Other possible uses include the sealing of incorrect cuts in asphalt surfaces. Also sealable using the round profile are "cross cuts", which are generated at corner points when cutting out rectangular sections. Attention should be paid in the following:
TOK®-Band Spezial Rundstrang:

- It should always be used with a primer (**TOK®-SK Primer**).

- At lower temperatures, the material should be pre-warmed using a burner, as it is easier to work with when heated.
- The material must be worked into the crack: merely "laying" the round profile on the crack is not sufficient.
- Ideally, the installed round profile is then also covered with **TOK®-SK Rissband**.

Ordering Information and Packaging

Diameter	Length	Rolls	m/box	m/pallet	Order number
8 mm	10 m	6	60	1,800	101 15 109
10 mm	7 m	6	42	1,260	101 14 782

Storage

Store dry and frost-free; do not stack boxes. Under these conditions,

TOK®-Band Spezial Rundstrang can be stored in the sealed original packaging

for at least 3 years from the date of manufacture.



DENSO GmbH

P.O. Box 150120 | 51344 Leverkusen | Germany
Phone: +49 214 2602-0 | Fax: +49 214 2602-217
www.denso.de | info@denso.de

Our product information, our application recommendations and other product related documents are made for your convenience only. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith. All information contained in this document is to be used as a guide and does not constitute a warranty of specification. The information contained in the document is subject to change without notice. For this reason, no liability can be accepted for inaccurate advice or any failure to provide advice.

The user is responsible for checking the applications of the product and verifying its suitability for the intended use. Our General Terms of Sale, which are available at www.denso.de, shall be decisive without any exception.

This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation of this product information, the German text of the respective German product information, which is available at www.denso.de, shall be decisive. The legal relationship shall be governed by German law.